

GB150 12V **3000A** | **9.0L** **7.0L**
Lithium | Gas Diesel

Lead Acid
Wet Gel MF EFB AGM
Auto | Marine | RV | Powersport | Lawn & Garden

NOCO BOOST[®] PRO[™] JUMP STARTER



START DEAD BATTERIES.[™]

Gas And Diesel Cars, Trucks, Boats, Commercial Vehicles, Equipment & More.

UltraSafe, ultra-compact, rugged, and portable lithium-ion jump starter. Features spark-proof technology and reverse polarity protection. Ideal for a wide range of small vehicle applications to larger vehicles with 9.0L gas and 7.0L diesel engines.

Equipped with an advanced integrated voltmeter. Provides remote power with 12V plug (included) for tire pumps, inverters, & phone chargers.



SPARK PROOF.

Safely connect to any 12-volt car battery with our mistake-proof design featuring spark-proof technology and reverse polarity protection.

JUMP START. 80X

Full power to jump start a vehicle up to 80 times in one charge. Compatible with engines up to 9.0L gas and 7.0L diesel.

USB CHARGE & RECHARGE.

It's internal battery can be used to recharge any personal mobile devices like smartphones, tablets, or any other USB device, and can be recharged by any powered USB port.

500 LUMENS. 10X LED

The GB150 portable car battery jump starter integrates with a high-output 500 lumen LED flashlight with 7 light modes: low, medium, high, flashing, strobe, and emergency SOS.

NOCO
30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co

NOCO[®]

MORE POWER.

A Fraction Of The Size.

2X

Lighter & Smaller

Compact, portable, pocket-sized jump starter that stores easily in a vehicle.

1 Year+

Holds Charge 4x Longer

The GB150 holds the charge four times longer to extend battery power life and eliminate charge time.

3X Fast Recharge

Go from zero to jump starting in 15 minutes, fully charges in just over 2 hours.

Compared to Leading Traditional Lead Acid Jump Starters

Voltmeter

Built-In Voltmeter Reads The Voltage Of The Vehicle's Battery For Enhanced Diagnostics And Troubleshooting.



Error LED. Illuminates Red if reverse polarity is detected.

Manual Override. Is a special feature designed for rare situations when a vehicle's battery is below 2-volts. Simply press and hold the manual override button for 3 seconds, until the Boost LED starts flashing, to enter into the mode. Press the button again (Or the power button) to exit Manual Override. This mode should be used cautiously, as Manual Override disables safety protection while enabled.

NOCO Patented Technology

Patented: visit no.co/patents



Recharge Unit from any USB or 12V port.

USB 2.1A

Charge virtually any USB device, including Smartphones and Tablets.

12V Portable Power

Remote power for a wide range of 12V devices including tire pumps, inverters, lights, phone chargers and more.

Technical Specifications

Internal Battery:	89 Watt-Hour Lithium Ion	Micro USB (Input) & USB (Output):	5V, 2.1A
Peak Current Rating:	3000A	Housing Protection:	IP65 (w/ Ports closed)
Operating Temperature:	-4°F to +122°F (-20°C to +50°C)	Cooling:	Natural Convection
Charging Temperature:	32°F to +104°F (0°C to +40°C)	Dimensions (LxWxH):	12.4 x 7.3 x 2.7 in
Storage Temperature:	-4°F to +122°F (-20°C to +50°C)	Unit Weight:	2.72 kg
12V (Input):	12V (5A)	Unit Weight & Accessories:	3.40 kg
12V (Output):	12V (15A)	LED Flashlight Brightness:	500 Lumens



Recharging a GB150

(for reference, results may vary)

USB Charger Rating	Charging Time	12V Fast Charge
.5A	45hr	5A @ 12V (36W) 2-3hr
1A	22hr	
2A	11hr	

What's In The Box

- GB150 Lithium Jump Starter
- XGC 12V Male Adapter
- XGC 12V Female Adapter
- Micro USB Cable
- Microfiber Storage Bag
- User Guide & Warranty Information

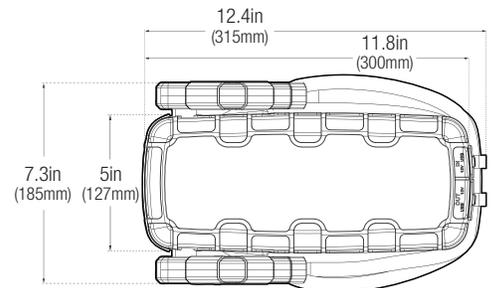

NOCO
30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co

NOCO®